



# 5SDA 07D3806

Old part no. DA 807-680-38

## Avalanche Diode

### Properties

- low on-state voltage
- avalanche reverse characteristics
- high operational reliability
- suitable for parallel operation

### Key Parameters

|            |   |       |    |
|------------|---|-------|----|
| $V_{RRM}$  | = | 3 800 | V  |
| $I_{FAVm}$ | = | 790   | A  |
| $I_{FSM}$  | = | 7 600 | A  |
| $V_{TO}$   | = | 1.010 | V  |
| $r_T$      | = | 0.720 | mΩ |

### Types

|                     |   |
|---------------------|---|
|                     | $V_{RRM}$   |
| <b>5SDA 07D3806</b> | <b>3 800 V</b>  |
| Conditions:         | $T_j = -40 \div 160 \text{ }^\circ\text{C}$ ,<br>half sine waveform,<br>$f = 50 \text{ Hz}$ |

### Mechanical Data

|       |                           |                       |
|-------|---------------------------|-----------------------|
| $F_m$ | Mounting force            | $11 \pm 1 \text{ kN}$ |
| $m$   | Weight                    | 0.23 kg               |
| $D_s$ | Surface creepage distance | 30 mm                 |
| $D_a$ | Air strike distance       | 20.5 mm               |

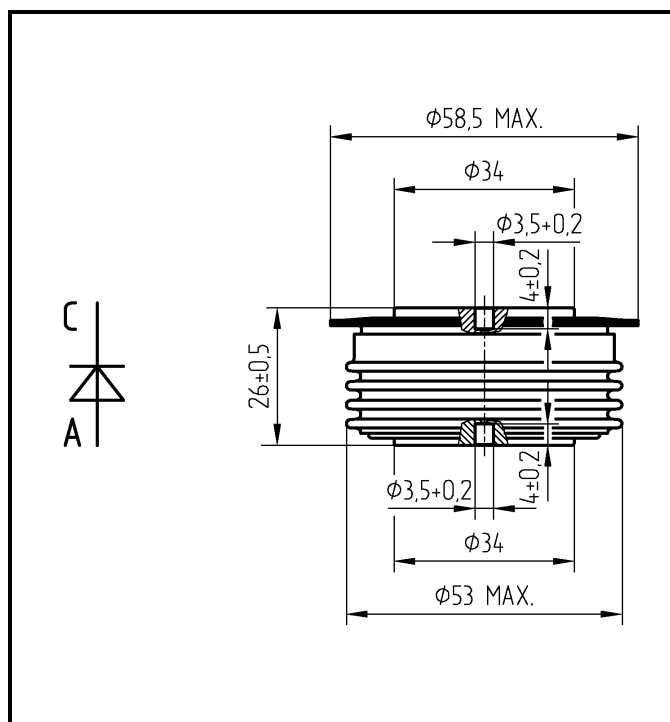


Fig. 1 Case



ABB s.r.o.

Novodvorska 1768/138a, 142 21 Praha 4, Czech Republic

tel.: +420 261 306 250, <http://www.abb.com/semiconductors>

| <b>Maximum Ratings</b> |   | <b>Maximum Limits</b>            | <b>Unit</b>                        |                       |
|------------------------|---|----------------------------------|------------------------------------|-----------------------|
| $V_{RRM}$              | <b>Repetitive peak reverse voltage</b><br>$T_j = -40 \div 160 \text{ }^\circ\text{C}$       | <b>3 800</b>                     | <b>V</b>                           |                       |
| $I_{FAVm}$             | <b>Average forward current</b><br>$T_c = 85 \text{ }^\circ\text{C}$                         | <b>790</b>                       | <b>A</b>                           |                       |
| $I_{FRMS}$             | <b>RMS forward current</b><br>$T_c = 85 \text{ }^\circ\text{C}$                             | <b>1 240</b>                     | <b>A</b>                           |                       |
| $I_{RRM}$              | <b>Repetitive reverse current</b><br>$V_R = V_{RRM}$  | <b>50</b>                        | <b>mA</b>                          |                       |
| $I_{FSM}$              | <b>Non repetitive peak surge current</b><br>$V_R = 0 \text{ V, half sine pulse}$            | $t_p = 8.3 \text{ ms}$           | <b>8 100</b>                       | <b>A</b>              |
|                        |   | $t_p = 10 \text{ ms}$            | <b>7 600</b>                       | <b>A</b>              |
| $I^2t$                 | <b>Limiting load integral</b><br>$V_R = 0 \text{ V, half sine pulse}$                       | $t_p = 8.3 \text{ ms}$           | <b>270 000</b>                     | <b>A<sup>2</sup>s</b> |
|                        |   | $t_p = 10 \text{ ms}$            | <b>289 000</b>                     | <b>A<sup>2</sup>s</b> |
| $P_{RSM}$              | <b>Maximum avalanche power dissipation</b><br><i>rectangular pulse 20 <math>\mu</math>s</i> | <b>50</b>                        | <b>kW</b>                          |                       |
| $T_{jmin} - T_{jmax}$  | <b>Operating temperature range</b>  | <b>-40 <math>\div</math> 160</b> | <b><math>^\circ\text{C}</math></b> |                       |
| $T_{STG}$              | <b>Storage temperature range</b>  | <b>-40 <math>\div</math> 160</b> | <b><math>^\circ\text{C}</math></b> |                       |

Unless otherwise specified  $T_j = 160 \text{ }^\circ\text{C}$

| <b>Characteristics</b> |   | <b>Value</b> |              |              | <b>Unit</b>                     |
|------------------------|---|--------------|--------------|--------------|---------------------------------|
|                        |   | <i>min</i>   | <i>typ</i>   | <i>max</i>   |                                 |
| $V_{T0}$               | <b>Threshold voltage</b>  |              |              | <b>1.010</b> | <b>V</b>                        |
| $r_T$                  | <b>Forward slope resistance</b><br>$I_F = 800 \div 2400 \text{ A}$  |              |              | <b>0.720</b> | <b>m<math>\Omega</math></b>     |
| $V_{FM}$               | <b>Maximum forward voltage</b><br>$I_{FM} = 1\,800 \text{ A}$   |              |              | <b>2.310</b> | <b>V</b>                        |
| $Q_{rr}$               | <b>Recovered charge</b><br>$V_R = 100 \text{ V, } I_{FM} = 1\,000 \text{ A, } di_F/dt = -5 \text{ A}/\mu\text{s}$ |              | <b>1 350</b> |              | <b><math>\mu\text{C}</math></b> |

Unless otherwise specified  $T_j = 160 \text{ }^\circ\text{C}$

| <b>Thermal Parameters</b> |  | <b>Value</b>                | <b>Unit</b> |
|---------------------------|--|-----------------------------|-------------|
| $R_{thjc}$                | <b>Thermal resistance junction to case</b> | <i>double side cooling</i>  | <b>40</b>   |
|                           |  | <i>anode side cooling</i>   | <b>65</b>   |
|                           |  | <i>cathode side cooling</i> | <b>104</b>  |
| $R_{thch}$                | <b>Thermal resistance case to heatsink</b> | <i>double side cooling</i>  | <b>10</b>   |
|                           |  | <i>single side cooling</i>  | <b>20</b>   |

### Transient Thermal Impedance

Analytical function for transient thermal impedance

$$Z_{thjc} = \sum_{i=1}^4 R_i (1 - \exp(-t / \tau_i))$$

Conditions:

$F_m = 11 \pm 1$  kN, Double side cooled

| $i$          | 1     | 2     | 3     | 4      |
|--------------|-------|-------|-------|--------|
| $R_i$ (K/kW) | 20.95 | 10.57 | 7.15  | 1.33   |
| $\tau_i$ (s) | 0.396 | 0.072 | 0.009 | 0.0044 |

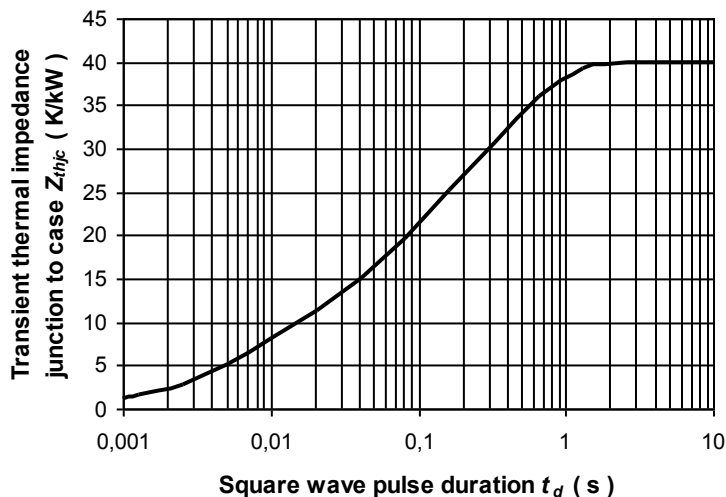


Fig. 2 Transient thermal impedance junction to case

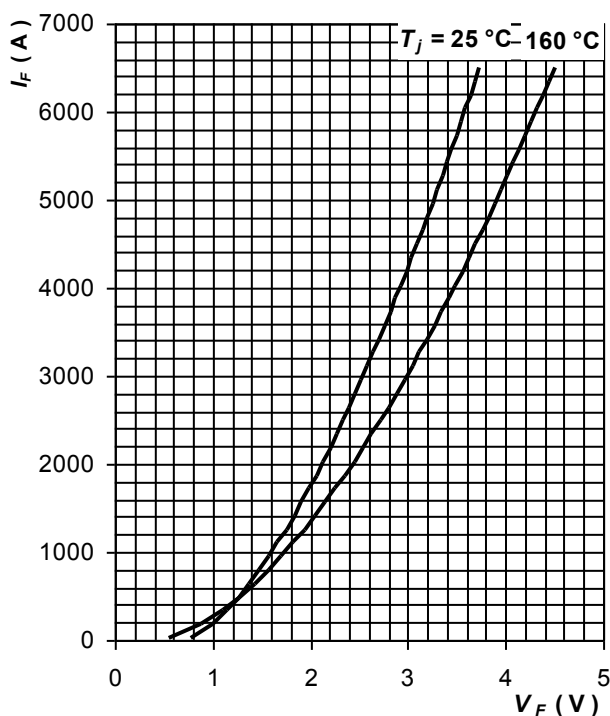


Fig. 3 Maximum forward voltage drop characteristics

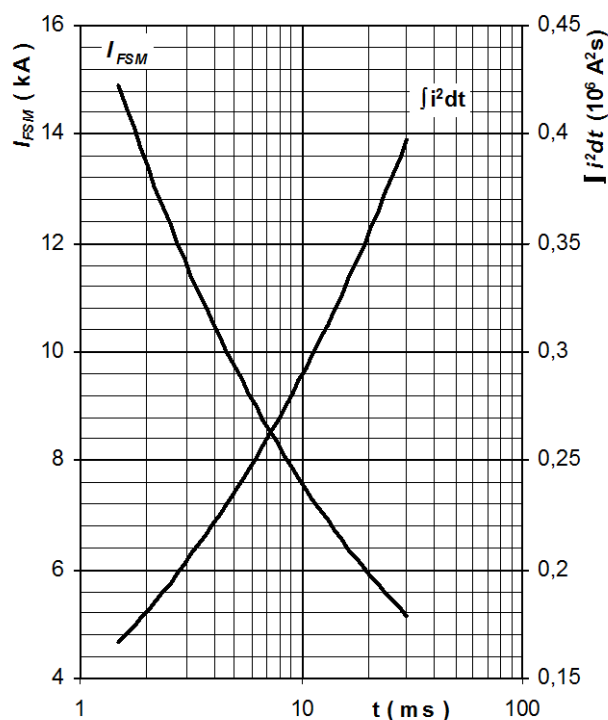


Fig. 4 Surge forward current vs. pulse length, half sine wave, single pulse,  $V_R = 0$  V,  $T_j = T_{jmax}$

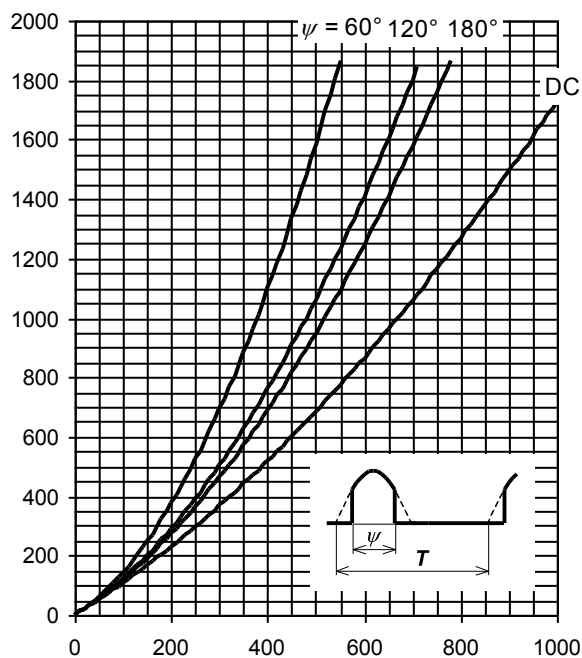


Fig. 5 Forward power loss vs. average forward current, sine waveform,  $f = 50 \text{ Hz}$ ,  $T = 1/f$

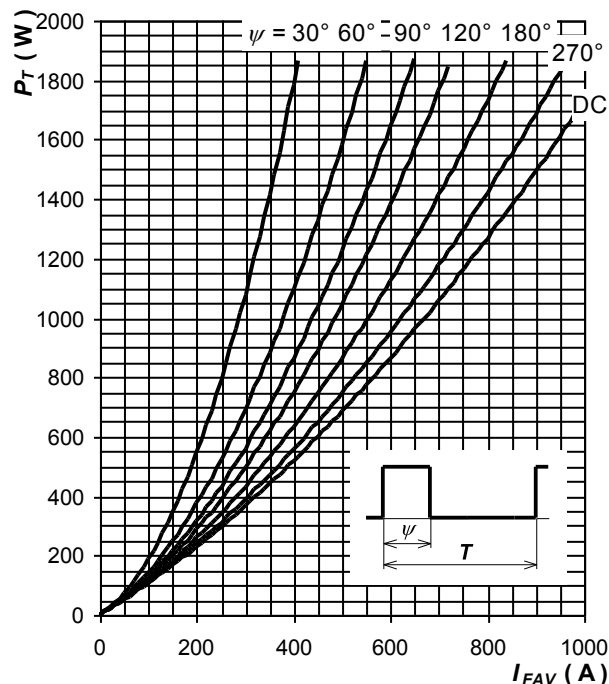


Fig. 6 Forward power loss vs. average forward current, square waveform,  $f = 50 \text{ Hz}$ ,  $T = 1/f$

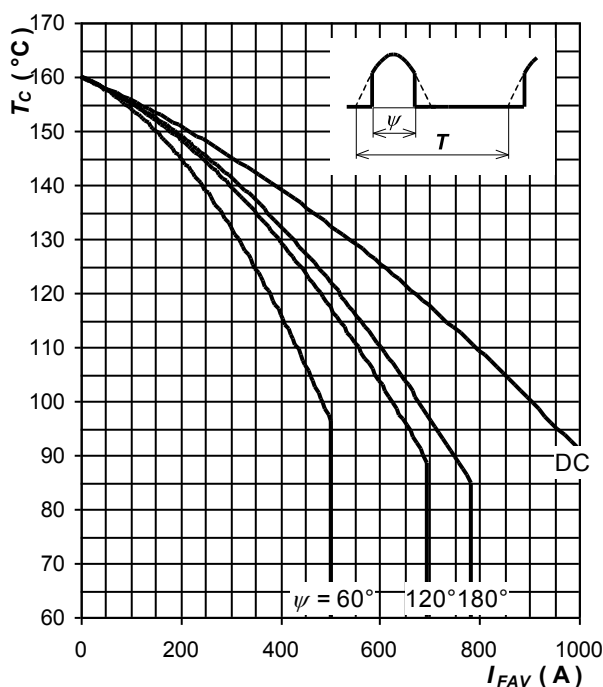


Fig. 7 Max. case temperature vs. aver. forward current, sine waveform,  $f = 50 \text{ Hz}$ ,  $T = 1/f$

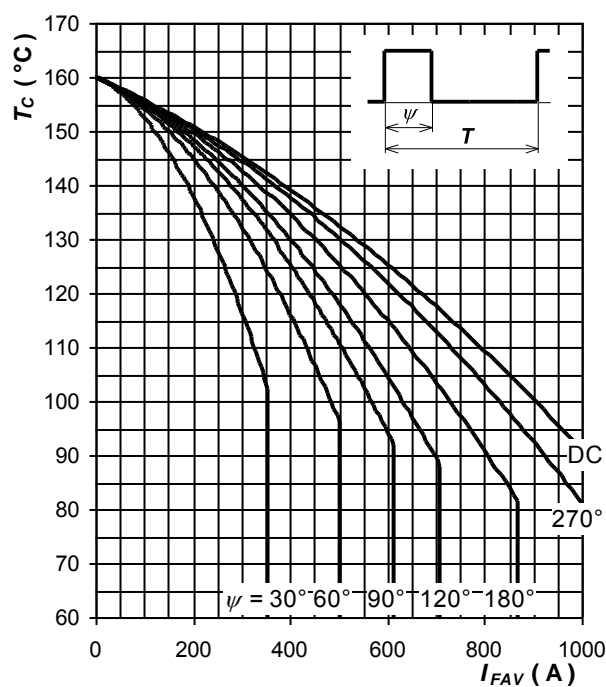


Fig. 8 Max. case temperature vs. aver. forward current, square waveform,  $f = 50 \text{ Hz}$ ,  $T = 1/f$

Notes: